

Introducing  
**CS80/90/110**



**Battery or Diesel operated compact sweepers  
with a great production capacity**

**They have a working width of 112, 122 and 142 cm**

# CS80/90/110


## Suitable for cleaning the most stubborn dirt on large outdoor and indoor surfaces such as big stores, squares and car parks up to more than 10,000 sq.m/h



The CS80/90/110 sweepers are suitable for cleaning big surfaces or small and narrow and cluttered up areas thanks to the box frame built around the centre brush which is very compact but also extremely strong.

The hydraulic system designed to reduce waste and keep oil temperature within optimum values increases performance and minimises the use of energy. The result of the combination of these elements is the considerable reduction

in consumption compared to the previous model and, as a result, the machine's autonomy is longer which is now able to work for up to 4 hours (CS90B-CS110B version installing 480 Ah C5 batteries). To guarantee maximum driving comfort for the operator at all times and maximum reliability, all the main functions are hydraulic: Traction; Lifting and emptying the rubbish container; Rotating the brushes; Vacuuming dust.

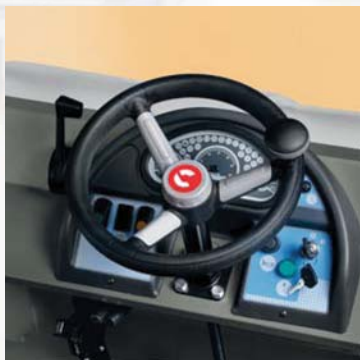

CS80/90/110 sweepers are fitted with an innovative instrument panel, like the one you would find in a car, with instant display of all the functions. The innovative steering wheel has been designed to make driving extremely comfortable

The vacuumed air is discharged through grilles located high up on the machine. This means that none of the dust that has settled on the surface surrounding the machine is lifted, thus guaranteeing excellent cleaning results








## CS80/90/110

**Studied to provide maximum driving comfort for the worker, maximum accessibility for routine maintenance, simple and quick, and to have extremely reduced running costs**

The CS80/90/110 sweepers have been created to make the operator's job comfortable and easy. They have been studied in minimum detail: the driver's seat can be accessed from both sides and the elegant instrument panel allows the operator to have the situation always under control. The CS80/90/110 sweepers are designed to provide maximum access to the

engine compartment (in the Diesel version) and to the battery compartment (in the battery version). Thanks to this accurate study, any type of routine and extraordinary maintenance can be done inside the machine without ever being obstructed, guaranteeing quickness and greatly reduced costs.

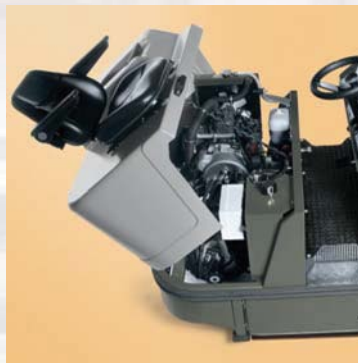

Just the checking of the oil or changing the filters for instance, in the motorised version, is now very easy. In the B version the box that houses the electrical devices is positioned centrally so it is quick and easy to check the devices and the level of the fluid in the battery elements. A battery box can be installed with a capacity of up to 480 Ah C5 (CS90B-CS110B version)

A fabric bag filter, with a large filtering surface - 7 sq.m (CS80) - 8 sq.m (CS90-CS110) - lasts a very long time and ensures excellent results even in environments where there is a lot of fine dust thanks to the powerful filter shaker.

The filter is easy to remove without the use of tools, to check or replace it.

No maintenance is required thanks to the periodical use of the electric filter shaker.

Filters in fabrics for specific applications are available upon request



The pressure and height adjustment of the central brush are controlled simply by the knob near the brush. Brush height adjustment depending on wear can, therefore, be done very easily. This ensures a longer brush life cycle

The central brush is the floating type and self-adjusts to keep in contact with the ground all the time

### Discharge height: 1.4 m

The front box for collecting dirt has a capacity\* of: 190 l. (CS80) - 220 l. (CS90) - 270 l. (CS110) and is lifted by a 2-piston hydraulic system operated by the handy control where the driver sits. Vacuuming is operated by a hydraulic motor

\* Measurement read on the edge of the filter



The pressure and height adjustment of the central brush are controlled simply by the knob near the brush. Brush height adjustment depending on wear can, therefore, be done very easily. This ensures a longer brush life cycle

The central brush is the floating type and self-adjusts to keep in contact with the ground all the time

**Discharge height: 1.4 m**

The front box for collecting dirt has a capacity\* of: 190 l. (CS80) - 220 l. (CS90) - 270 l. (CS110) and is lifted by a 2-piston hydraulic system operated by the handy control where the driver sits. Vacuuming is operated by a hydraulic motor

TECHNICAL DESCRIPTION		CS80B	CS80D	CS90B	CS90DC	S110BC	S110D
Forward speed	km/h	0÷8	0÷8	0÷8	0÷80	÷8	0÷8
Max gradient with empty hopper	%	14	20	14	20	14	20
Max gradient with full hopper	%	10	10	10	10	10	10
Electric motor	V/W	36/4000	-	36/4000	-3	6/4000	-
Diesel engine	HP	-	14 (Perkins)	-	20 (Perkins)-	-	20 (Perkins)
Filter shaker motor	V/W	12/110	12/110	12/110	12/110	12/110	12/110
Suction	m³/h	hydraulic 160	hydraulic 160	hydraulic 160	hydraulic 160h	hydraulic 160h	hydraulic 160
Dump height	mm	1400	1400	1400	1400	1400	1400
Debris hopper capacity with filter/without filter	l	190/360	190/360	220/400	220/4002	70/480	270/480
Filter surface area	m²	7	7	8	88	-	8
Batteries	V/Ah C5	36/320	-	36/480	-3	6/480-	-
Batteries weight	Kg	340	-	500	-5	00	1

comoc	Working width (with side brush) mm	Number of side brushes/ Ø mm	Power supply V/ traction	Central brush width mm	Front-mounted hopper	Rear-mounted hopper	Type of dumping system	Working width up to m²/h	Machine dimensions mm L x H x W	Machine weight kg (without batteries)
CS80B	1120	1-2/500	36/ hydraulic	800	•	-	hydraulic	9510	2020 1430 1130	700
CS90B	1220	1-2/500	36/ hydraulic	900	•	-	hydraulic	10370	2020 1430 1230	710
CS110B	1420	1-2/500	36/ hydraulic	1100	•	-	hydraulic	12070	2020 1430 1430	750
CS80D	1120	1-2/500	-/ hydraulic	800	•	-	hydraulic	10080	2020 1430 1130	730
CS90D	1220	1-2/500	-/ hydraulic	900	•	-	hydraulic	10980	2020 1430 1230	770
CS110D	1420	1-2/500	-/ hydraulic	1100	•	-	hydraulic	12780	2020 1430 1430	820

The machines are manufactured in compliance with the directives 2006/42/CE, 2006/95/CE, 2004/108/CE and with the standards IEC 60335-1 and IEC 60335-2-72.

The steel parts are subject to treatment which guarantees a long life and makes the parts oxidation-proof.

**KEY WORDS:**



Machine for industrial use



B - Battery powered machine with voltage value



D-Diesel-powered machine

**CONTACT ALL BRANCHES**  
**Tel: 1300 347 347**  
**Fax: 1300 348 348**

[www.centralcleaning.com.au](http://www.centralcleaning.com.au)  
 Email: [sales@centralcleaning.com.au](mailto:sales@centralcleaning.com.au)



**VICTORIA - NEW SOUTH WALES - TASMANIA**  
**SOUTH AUSTRALIA - QUEENSLAND - WESTERN AUSTRALIA**